



1.

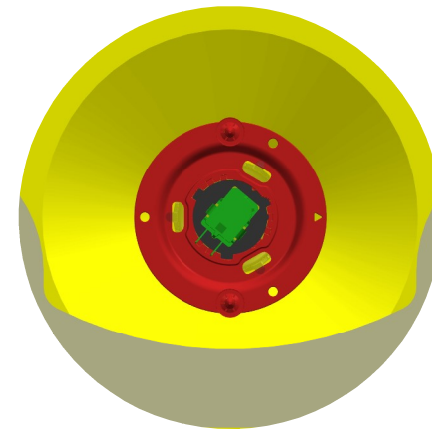

2. Insert By
Aligning Switch Bracket
with Receptacle

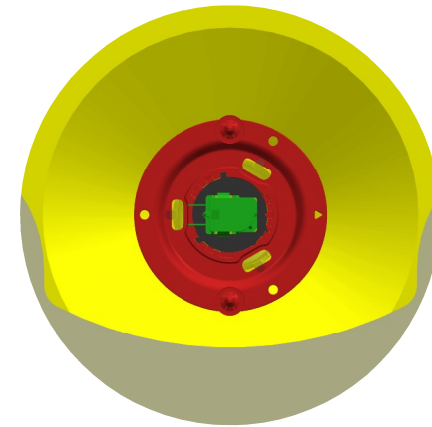

3. Rotate Clockwise
Approx. 45 degrees
To Secure

SEATS INCORPORATED ASSUMES NO RESPONSIBILITY FOR DAMAGE OR INJURY CAUSED BY IMPROPER SPACING TO VEHICLE CONTROLS OR INSTALLATION METHOD. THIS IS ONLY A GUIDELINE AND DOES NOT GUARANTEE SATISFACTORY SEAT FUNCTION DUE TO INCOMPLETE OR IMPROPER INSTALLATION. PARTS SUPPLIED BY **SEATS INCORPORATED** ARE COVERED BY A LIMITED WARRANTY.

seats 

SIZE: A DRAWN BY: MEZ
DATE: 08/21/18 REV. 00 DWG. NO.